



Power Generation

mtu KINETIC POWERPACK

Product data for dynamic UPS solutions

Edition 2/21, valid from 06/2021



A Rolls-Royce
solution

Ready for a new perspective on dynamic UPS?

mtu KINETIC POWERPACK

Our **mtu** Kinetic PowerPack provides dynamic uninterruptible power supply through kinetic energy and is engineered to withstand the most demanding power supply challenges.

Lower TCO

At medium and higher power ratings, **mtu** Kinetic PowerPacks are more cost-effective, reducing consumable electricity cost and maintenance.

Smaller footprint

Its component count and monobloc structure give the **mtu** Kinetic PowerPack a compact design, reducing its footprint to 40% of an equivalently rated static UPS system – making it the smallest in the market.

Units up to 3000 kVA

The current-carrying capability of electronic components does not limit **mtu** Kinetic PowerPacks. Their per unit ratings are considerably more significant, leading to a much lower component count on higher power installations.

mtu diesel engine

Complying with the latest emissions standards; preheated; pre-lubricated; quick start and not running during conditioning mode.

Lower environmental impact

Dynamic UPS systems do not require heavy batteries and do not generate chemical waste. The energy is immediately available from the kinetic energy storage unit to provide power until the diesel engine is activated.

Medium voltage systems

mtu Kinetic PowerPacks are the perfect solution for medium voltage critical loads or when more considerable distribution distances need to be covered.

Kinetic energy module

Patented accu provides stored kinetic energy to ride through mains interruptions; designed for a 10-year bearing life.

Synchronous machine

Four-pole synchronous machines from world-renowned manufacturers designed not to exceed Class F temperature rise; right-sized for your application and to absorb load harmonics.


Electromagnetic clutch

The prime starter system consists of standard engine starting motors. The clutch is maintenance-free and guarantees the diesel engine to start at all times, thanks to the redundant start feature.

mtu Kinetic PowerPack

Vibration isolation

Thanks to the solid base frame with isolators between frame and equipment and direct floor installation, vibrations are reduced >97%.

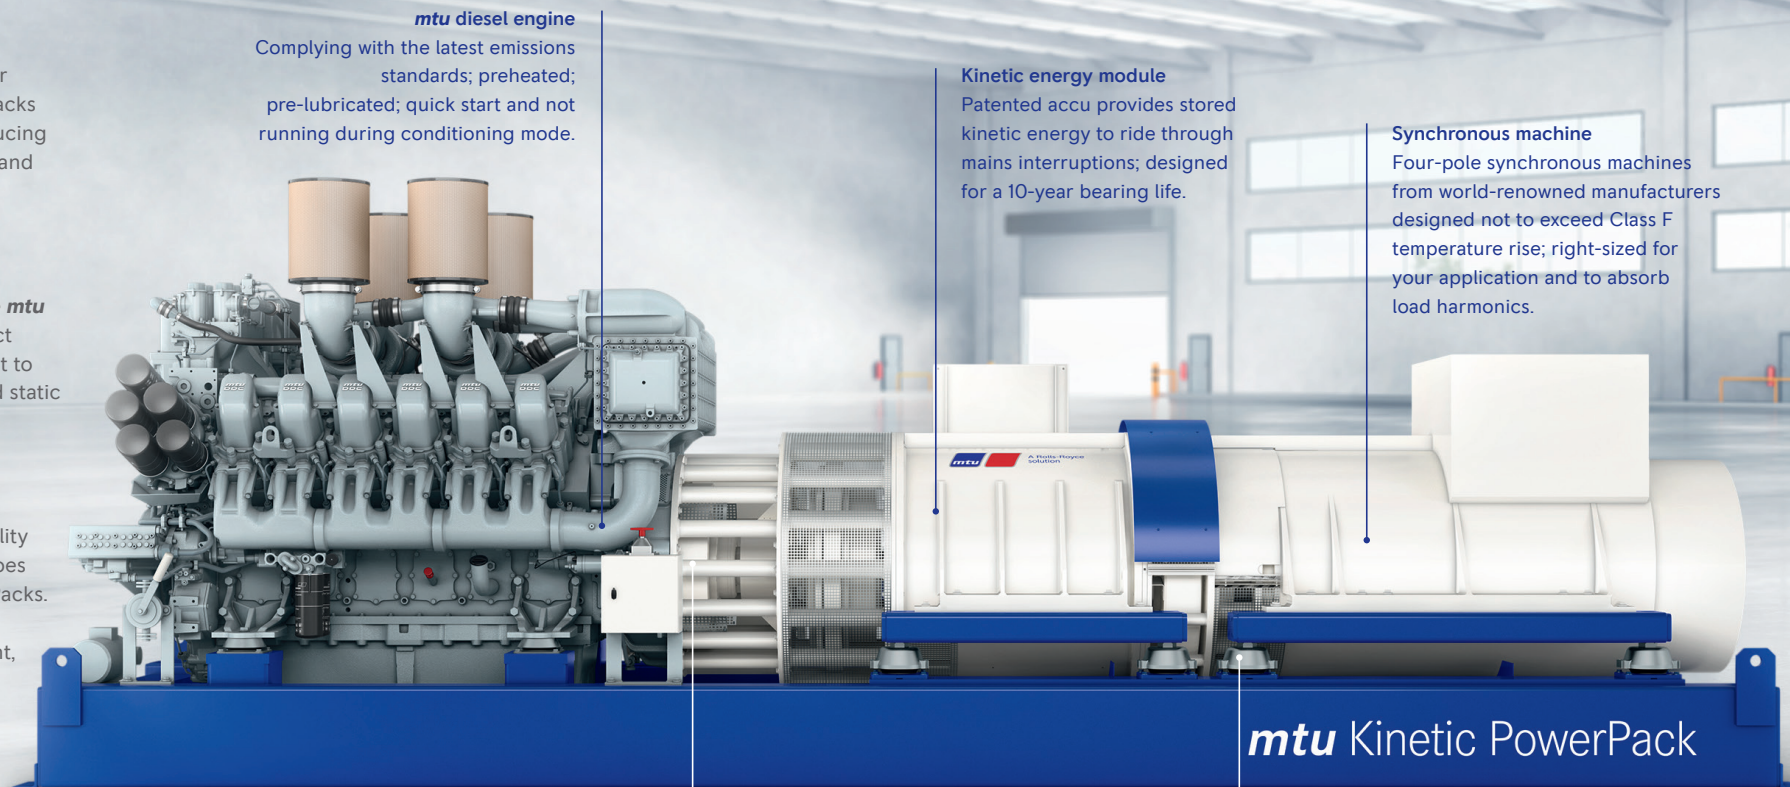

Standby power – dynamic uninterruptible power supply systems

STANDBY POWER (3D) –
50 HZ/1500 RPM.

Power output ¹⁾				Available voltages		Emissions					Accu arrang.	
mtu KP5	no-break	no-break	short-break	short-break	low voltage 380 - 415V (3 Phase)	medium voltages 6 - 36 kV (3 Phase)	Fuel consumption optimized	NOx emission optimized	NEA Singapore for ORDE	US EPA Tier 2 compliant	EU Nonroad Stage II compliant (97/68/EC)	
	kVA	kWe	kVA	kWe								
	250	200			x	x		x				single
	300	240			x	x		x				single
	400	320			x	x	x		x			single
	500	400			x	x	x					single
	630	504			x	x	x		x			single
	700	560			x	x	x					single
	900	720			x	x	x					single
	1000	800			x	x	x					single
	1250	1000			x	x	x		x			single
	1500	1200			x	x	x		x			single
	1650	1320	600	480	x	x	x		x			single
	1700	1360			x	x	x		x			single
	1875	1500	625	500	x	x	x		x			single
	2000	1600			x	x	x		x			single
	2250	1800			x	x	x		x			bi
2500	2000			x	x	x		x			bi	
2750	2200			x	x	x		x			bi	
mtu KP7												
	2250	1800			x	x	x		x			single
	2500	2000			x	x	x		x			single
	2750	2200			x	x	x		x			single

Certifications				Perform. class ²⁾		Uptime compl.		Housing	
ISO 8528	CE/IEC	NFPA 110	VDE-AR-N 4110 (German Grid Code)	ISO 8528-5 - G3	ISO 8528-5 - G4	Tier I & Tier II	Tier III & Tier IV	Enclosure	Container
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x
x				x		x			x

Standby power – dynamic uninterruptible power supply systems

STANDBY POWER (3D) –
60 HZ/1800 RPM.

	Power output ¹⁾				Available voltages		Emissions					Accu arrang.
	no- break kVA	no- break kWe	short- break kVA	short- break kWe	low voltage 208 - 480V (3 Phase)	medium voltages 4 - 36 kV (3 Phase)	US EPA stationary EMERG Tier 3 (40 CF 60)	US Nonroad Tier 3 compliant	US EPA stationary EMERG Tier 2 (40 CF 60)	US Nonroad Tier 2 compliant	Fuel consumption optimized	
mtu KP5	250	200			x	x					x	single
	300	240			x	x					x	single
	400	320			x	x					x	single
	500	400			x	x			x	x		single
	625	500			x	x			x	x		single
	800	640			x	x				x		single
	1000	800			x	x				x		single
	1250	1000			x	x				x		single
	1500	1200			x	x			x	x	x	single
	1700	1360			x	x			x	x	x	single
	1875	1500	1125	900	x	x			x	x	x	single
	2000	1600			x	x			x	x	x	single
	2000	1600	500	400	x	x			x	x	x	single
	2500	2000			x	x			x	x	x	bi
	3000	2400			x	x			x	x	x	bi
	3000	2400	300	240	x	x			x	x	x	bi
mtu KP7	2500	2000			x	x			x	x	x	single
	3000	2400			x	x			x	x	x	single
	3000	2400	300	240	x	x			x	x	x	single

Certifications				Uptime compl.		Housing	
ISO 8528	UL2200	NFPA 110	IBC 2012	Tier I & Tier II	Tier III & Tier IV	Enclosure	Container
	x			x			x
	x			x			x
	x			x			x
	x			x			x
	x			x			x
	x			x			x
	x			x			x
	x			x			x
	x			x			x
	x			x			x
	x			x			x
	x			x			x
	x			x			x
	x			x			x
	x			x			x

Standby power – dynamic uninterruptible power supply systems

DATA CENTER CONTINUOUS POWER (3F) –
50 HZ/1500 RPM.

	Power output ¹⁾				Available voltages		Emissions					Accu arrang.
	no-break	no-break	short-break	short-break	low voltage 380 - 415V (3 Phase)	medium voltages 6 - 36 kV (3 Phase)	Fuel consumption optimized	NOx emission optimized	NEA Singapore for ORDE	US EPA Tier 2 compliant	EU Nonroad Stage II compliant (97/68/EC)	
	kVA	kWe	kVA	kWe								
mtu KP5	400	400			x	x	x	x	x			single
	480	384			x	x	x	x	x			single
	630	504			x	x	x	x	x			single
	1250	1000			x	x	x	x	x			single
	1500	1200			x	x	x	x	x			single
	1650	1320	600	480	x	x	x	x	x			single
	1700	1360			x	x	x	x	x			single
	1875	1500	625	500	x	x	x	x	x			single
	2000	1600			x	x	x	x	x			single
	2200	1760			x	x	x	x	x			bi
	2500	2000			x	x	x	x	x			bi
	2750	2200			x	x	x	x	x			bi
mtu KP7	2250	1800			x	x	x	x	x			single
	2500	2000			x	x	x	x	x			single
	2750	2200			x	x	x	x	x			single

Certifications				Perform. class ²⁾		Uptime compl.		Housing	
ISO 8528	CE/IEC	NFPA 110	VDE-AR-N 4110 (German Grid Code)	ISO 8528-5 - G3	ISO 8528-5 - G4	Tier I & Tier II	Tier III & Tier IV	Enclosure	Container
x	x			x		x	x		x
x	x			x		x	x		x
x	x			x		x	x		x
x	x			x		x	x		x
x	x			x		x	x		x
x	x			x		x	x		x
x	x			x		x	x		x
x	x			x		x	x		x
x	x			x		x	x		x
x	x			x		x	x		x
x	x			x		x	x		x
x	x			x		x	x		x
x	x			x		x	x		x

Standby power – dynamic uninterruptible power supply systems

DATA CENTER CONTINUOUS POWER (3F) – 60 HZ/1800 RPM.

Power output ¹⁾				Available voltages		Emissions					Accu arrang.	
mtu KP5	no-break	no-break	short-break	short-break	low voltage 208 - 480V (3 Phase)	medium voltages 4 - 36 kV (3 Phase)	US EPA stationary EMERG Tier 3 (40 CF 60)	US Nonroad Tier 3 compliant	US EPA stationary EMERG Tier 2 (40 CF 60)	US Nonroad Tier 2 compliant	Fuel consumption optimized	
	kVA	kWe	kVA	kWe								
	500	400			x	x			x	x		single
	625	500			x	x			x	x		single
	1500	1200			x	x			x	x	x	single
	1700	1360			x	x			x	x	x	single
	1875	1500	1125	900	x	x			x	x	x	single
	2000	1600			x	x			x	x	x	single
	2000	1600	500	400	x	x			x	x	x	bi
	2500	2000			x	x			x	x	x	bi
3000	2400			x	x			x	x	x	bi	
mtu KP7												
	2500	2000			x	x			x	x	x	single
	3000	2400			x	x			x	x	x	single

Certifications				Uptime compl.		Housing	
ISO 8528	UL2200	NFPA 110	IBC 2012	Tier I & Tier II	Tier III & Tier IV	Enclosure	Container
	x			x	x		x
	x			x	x		x
	x			x	x		x
	x			x	x		x
	x			x	x		x
	x			x	x		x
	x			x	x		x
	x			x	x		x
	x			x	x		x

Rating definitions

FOR POWER SOLUTIONS.

Standby power**Standby power (3D)**

Standby power applies to installations served by a reliable utility source. The standby ratings are applicable to varying loads for the duration of a power outage.

**Data center continuous power (3F)**

Data center continuous power is a specific mission critical application. It is especially designed for the use in data centers as emergency standby units. "Data centre continuous power" offers an economic and customer friendly solution to comply to the Uptime Institute* Tier III and Tier IV standards.



OVERVIEW

Standby power	mtu Power Generation	ISO 8528-1 (ESP)
Standby power (3D)		
Load	variable	variable
Load factor	≤ 85 %	≤ 70 %
10 % overload (ICXN)	no	not specified
Max. operating hours (per year)	500 h	200 h
Uptime compliant	Tier I & Tier II	not specified

Data center continuous power (3F)	mtu Power Generation	ISO 8528-1 (DCP)
Load	continuous	continuous or variable
Load factor	≤ 100 %	≤ 100 %
10 % overload (ICXN)	yes	not specified
Max. operating hours (per year)	unlimited ^(B)	unlimited
Uptime compliant	Tier I - Tier IV	not specified

* The Uptime Institute is a pioneer in creating and operating knowledge communities for improving uptime effectiveness in data center facilities and information technology organizations.

FOOTNOTES.

Application descriptions, e.g. load factor, applies to mtu powered equipment.

- (1) Power output based on 400V, fuel consumption opt. emission level and standard or optional generator. For arrangements with other emissions, voltages and/or optional generators, ratings may vary. Series 4000 without cooling package.
- (2) Ambient conditions and load application acc. to ISO 8528
- (3) Cooling variants:
A2A: air-to-air charge air cooling (TD)
W2A: water-to-air charge air cooling (TB)

50Hz – Power available up to:

Standard:

Site altitude above sea level: 400 m
Intake air temperature: 40°C

NOx emission optimized:

Site altitude above sea level: 100 m
Intake air temperature: 25°C

NEA Singapore:

Site altitude above sea level: 100 m
Intake air temperature: 40°C

60Hz – Power available up to:

Standard:

Site altitude above sea level: 400 m
Intake air temperature: 25°C

Classification for Data Center Continuous Power

ACCORDING TO THE UPTIME INSTITUTE.

Tier I

Tier I is composed of a single path for power and cooling distribution, without redundant components.

Tier II

Tier II is composed of a single path for power and cooling distribution, with redundant components.

Tier III

Tier III is composed of multiple active power and cooling distribution paths, but only one active path has redundant components and is concurrently maintainable.

Tier IV

Tier IV is composed of multiple active power and cooling distribution paths, has redundant components and is fault tolerant.

	Tier I	Tier II	Tier III	Tier IV
Delivery paths	One	One	One active + one passive	Two active
Redundant components	No	Yes	Yes (for active path)	Yes (for two active path)
Simultaneously maintainable	No	No	Yes	Yes
Fault tolerance (single event)	No	No	No	Yes
Compartmentalisation	No	No	No	Yes
Suitable mtu power generation application	Standby power (3D) Prime power for stationary emergency (3E) Prime power (3B) Grid stability power (3G)		Data center continuous power (3F) Continuous power (3A)	


For complete definition see <http://uptimeinstitute.com/>

Conversion table

NUMBERS TO BACK YOU UP.

1 kW	= 1.360 PS	g	= 9.80665 m/s ²
1 kW	= 1.341 bhp	л	= 3.14159
1 bhp	= 1.014 PS	e	= 2.71828
1 oz	= 28.35 g		
1 lb	= 453.59 g	1 lb	= 16 oz
1 short ton	= 907.18 kg	1 short ton	= 2000 lbs
1 lb/bhp	= 447.3 g/PSH	1 ft lb	= 1.356 Nm
1 lb/bhp	= 608.3 g/kWh	1 ft/min	= 0.00508 m/s
1 gal/bhp (US)	= 4264 g/kWh	pDiesel	= 0.83 kg/l
1 kWh	= 860 kcal	1 lb/sqin	= 0.069 bar (1 psi)
1 cal	= 4.187 J	1 mm Hg	= 1.333 mbar (133.3 Pa)
1 BTU	= 1.055 kJ	1 mm H ₂ O	= 0.0981 mbar (9.81 Pa)
1 inch	= 2.540 cm	T (K)	= t (°C) + 273.15
1 sq. inch	= 6.542 cm ²	t (°C)	= 5/9 x (t (°F) - 32)
1 cu. inch	= 16.387 cm ³	t (°C)	= 5/4 x t (°R)
1 foot	= 3.048 dm	1 foot	= 12 inches
1 sq. foot	= 9.290 dm ²	1 yard	= 3 feet
1 mile	= 1.609 km	1 mile	= 5280 feet
1 naut. mile	= 1.853 km	1 naut. mile	= 6080 feet
1 UK Gallon	= 4.546 l	1 US Barrel	= 0.159 m ³
1 US Gallon	= 3.785 l		= 42 US Gallons
Energy:	1 J = 1 Ws = 1 VAs = 1 Nm		
Power:	1 W = 1 VA = 1 Nm/s		
Force:	1 N = 1 kgm/s ²		
Pressure:	1 Pa = 1 N/m ² (1 bar = 10 ⁵ Pa)		
MEP (bar)	$= \frac{P_{cyl}(kW)}{n(l/min) \times V_{cyl}(l)}$		
Torque (Nm)	$= \frac{P_{ges}(kW) \times 30000}{n(l/min) \times \pi}$		

Stay up-to-date by following
mtusolutions under:



Rolls-Royce Group
www.mtu-solutions.com/powergen

Rolls-Royce Solutions Liège S.A.
Rue de l'Avenir, 61
Parc Industriel
B-4460, Grâce-Hollogne
Belgium

T +32 4 247 79 00
F +32 4 246 20 20
marcom@rolls-royce-solutions.com