

# **Diesel Generator Set**



# *mtu* 20V4000 DS2750

380V – 11 kV/50 Hz/standby power/NEA (ORDE) optimized 20V4000G64F/water charge air cooling



Optional equipment and finishing shown. Standard may vary.

# Product highlights

#### Benefits

- Low fuel consumption
- Optimized system integration ability
- High reliability
- High availability of power
- Long maintenance intervals

## Support

- Global product support offered

## Standards

- Engine-generator set is designed and manufactured in facilities certified to standards ISO 2008:9001 and ISO 2004:14001
- Generator set complies to ISO 8528
- Generator meets NEMA MG1, BS 5000, ISO, DIN EN and IEC standards
- NFPA 110

## Power rating

- System ratings: 2660 kVA 2900 kVA
- Accepts rated load in one step per NFPA 110\*
- Generator set complies to G3 according to ISO 8528-5
- Generator set exceeds load steps according to ISO 8528-5\*

#### Performance assurance certification (PAC)

- Engine-generator set tested to ISO 8528-5 for transient response
- 85% load factor
- Verified product design, quality and performance integrity
- All engine systems are prototype and factory tested

#### Complete range of accessories available

- Control panel
- Power panel
- Circuit breaker/power distribution
- Fuel system
- Fuel connections with shut-off valve mounted to base frame
- Starting/charging system
- Exhaust system
- Mechanical and electrical driven radiators
- Medium and oversized voltage alternators

#### Emissions

NEA (ORDE) optimized

#### Certifications

- CE certification option
- Unit certificate acc. to VDE-AR-N 4110



# Application data<sup>1)</sup>

#### Engine

Manufacturer		mtu
Model	2	20V4000G64F
Туре		4-cycle
Arrangement		20V
Displacement: l		95.4
Bore: mm		170
Stroke: mm		210
Compression ratio		16.4
Rated speed: rpm		1500
Engine governor		ECU 9
Max power: kWm		2420
Air cleaner		dry
Fuel system		
Maximum fuel lift: m		5
Total fuel flow: I/min		27
Fuel consumption <sup>2)</sup>	l/hr	g/kwh
At 100% of power rating:	574.4	197
At 75% of power rating:	450.5	206
At 50% of power rating:	319.3	219

## Liquid capacity (lubrication)

Total oil system capacity: l	300
Engine jacket water capacity: l	205
Intercooler coolant capacity: l	50
Combustion air requirements	
Combustion air volume: m³/s	2.7
Max. air intake restriction: mbar	50
Cooling/radiator system	
Coolant flow rate (HT circuit): m³/hr	80
Coolant flow rate (LT circuit): m³/hr	32.5
Heat rejection to coolant: kW	980
Heat radiated to charge air cooling: kW	410
Heat radiated to ambient: kW	105
Fan power for electr. radiator (40°C): kW	70
Exhaust system	
Exhaust gas temp. (after turbocharger): °C	540
Exhaust gas volume: m³/s	7.1
Maximum allowable back pressure: mbar	85
Minimum allowable back pressure: mbar	30

# Standard and optional features

## System ratings (kW/kVA)

Generator model	Voltage	NEA (ORDE) optimized					
			without radiator			with mechanical radiator	
		kWel	kVA*	AMPS	kWel	kVA*	AMPS
Leroy Somer LSA52.3 UL16	380 V	2240	2800	4254	2240	2800	4254
(Low voltage	400 V	2240	2800	4041	2240	2800	4041
Leroy Somer standard)	415 V	2240	2800	3895	2240	2800	3895
Leroy Somer LSA53.2 M12	380 V	2240	2800	4254	2240	2800	4254
(Low voltage	400 V	2240	2800	4041	2240	2800	4041
Leroy Somer oversized)	415 V	2240	2800	3895	2240	2800	3895
	380 V	2272	2840	4315	2264	2830	4300
Marathon 1020FDL7093 (Low voltage Marathon)	400 V	2184	2730	3940	2184	2730	3940
	415 V	2128	2660	3701	2128	2660	3701
Marathon 1030FDL7094 (Low voltage Marathon oversized)	380 V	2272	2840	4315	2264	2830	4300
	400 V	2184	2730	3940	2184	2730	3940
01010.200,	415 V	2128	2660	3701	2128	2660	3701
Marathon 1030FDH7101 (Medium volt. marathon)	11 kV	2312	2890	152	2248	2810	147
Leroy Somer LSA53.2 ZL12 (Medium volt. Leroy Somer)	11 kV	2320	2900	152	2240	2800	147

\* cos phi = 0.8

1 All data refers only to the engine and is based on ISO standard conditions (25°C and 100m above sea level).

2 Values referenced are in accordance with ISO 3046-1. Conversion calculated with fuel density of 0.83 g/ml. All fuel consumption values refer to rated engine power.

## Standard and optional features

#### Engine

- 4-cycle
- Standard single stage air filter
- Oil drain extension & shut-off valve
- Closed crankcase ventilation
- Governor-electronic isochronous
- Common rail fuel injection
- NEA (ORDE) optimized engine

#### Generator

- 4 pole three-phase synchronous generator
- Brushless, self-excited, self-regulating, self-ventilated
- Digital voltage regulator
- Anti condensation heater
- Stator winding Y-connected, accessible neutral (brought out)
- Protection IP23

- Insulation class H, utilization acc. to H
- Radio suppression EN 55011, group 1, cl. B
- Short circuit capability 3xIn for 10sec Winding and bearing RTDs
- (without monitoring)

Mechanical radiator

□ Jacket water heater

- Excitation by AREP
- Mounting of CT's: 2 core CT's
- Winding pitch: 2/3 winding
- Voltage setpoint adjustment ± 10%

□ Electrical driven front-end cooler

- Meets NEMA MG-1, BS 5000, IEC 60034-1, VDE 0530, DIN EN 12601, AS 1359 and ISO 8528-3 requirements
- Leroy Somer low voltage generator
- □ Marathon low voltage generator
- □ Oversized generator
- Medium voltage generator

- Cooling system
- Jacket water pump
- Thermostat(s)
- Water charge air cooling
- Control panel
- Unit cabling with coded plugs for easy connection of customer-specific controls (VO)
- □ Pre-wired control cabinet for easy application of customized controller (V1+)
- □ Island operation (V2)
- □ Automatic mains failure operation with ATS (V3a)
- $\Box$  Automatic mains failure operation incl. control of generator and mains breaker (V3b)
- □ Island parallel operation of multiple gensets (V4)
- □ Automatic mains failure operation with short (< 10s) mains parallel overlap synchronization (V5)
- Connectivity

The engine system automatically collects and transfers engine data to the manufacturer from time to time. The data is used by the manufacturer for the purposes of product

a single genset (V6)

- multiple gensets (V7)
- □ Basler controller

- SAE J1939 engine ECU communications
- Parametrization software
- Multilingual capability
- Multiple programmable contact inputs
- Multiple contact outputs

- Event recording
- □ IP 54 front panel rating with integrated gasket
- □ Different expansion modules
- Remote annunciator
- Daytank control
- □ Generator winding temperature monitoring
- □ Generator bearing temperature monitoring
- □ Modbus TCP-IP

development and improvement as well as service optimization. Users can log in or register via https://mtu-go.com and also gain insight into the data.

- □ Mains parallel operation of
- □ Mains parallel operation of
- Deif controller
- □ Complete system metering
- Digital metering
- Engine parameters
- Generator protection functions
- Engine protection

# Standard and optional features

## Power panel


□ Supply electrical driven radiator from 45kW - 75kW

#### Circuit breaker/power distribution

<ul> <li>3-pole circuit breaker</li> <li>4-pole circuit breaker</li> </ul>	Electrical-actuated circuit breaker	Base frame mounted GCB, pre-wired with generator, ready for commissioning
Fuel system		
<ul> <li>Flexible fuel connectors mounted to base frame</li> <li>Fuel filter with water separator</li> <li>Fuel filter with water separator heavy-duty</li> </ul>	<ul> <li>Switchable fuel filter with water separator</li> <li>Switchable fuel filter with water separator heavy-duty</li> <li>Seperate fuel cooler</li> </ul>	Fuel cooler integrated into cooling equipment
Starting/charging system		
<ul> <li>24V starter</li> <li>Redundant starting system</li> </ul>	<ul> <li>Starter batteries, cables, rack, disconnect switch (lockable)</li> </ul>	<ul> <li>Battery charger</li> <li>Alternator</li> </ul>
Mounting system		
Welded base frame	<ul> <li>Resilient engine and generator mounting</li> <li>Modular base frame design</li> </ul>	Base frame mounting on foundation/base plate with using clamping brackets
Exhaust system		
Exhaust bellows with connection flange	Exhaust silencer with	Exhaust silencer with

- □ Exhaust silencer with 10 dB(A) sound attenuation
- 30 dB(A) sound attenuation
- 40 dB(A) sound attenuation □ Y-connection-pipe

## Weights and dimensions

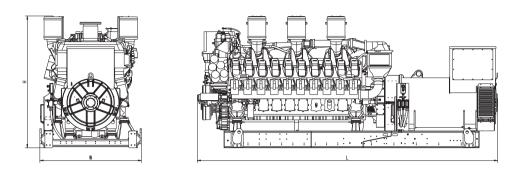

Drawing above for illustration purposes only, based on a standard open power 400 Volt engine-generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

System	Dimensions (LxWxH)	Weight (dry/less tank)	
Open power unit (OPU)	5350 x 1810 x 2348 mm	16554 kg	

Weights and dimensions are based on open power units and are estimates only. Consult the factory for accurate weights and dimensions for your specific engine-generator set.

## Sound data

## Emissions data

- Consult your local *mtu* distributor for sound data.
- Consult your local *mtu* distributor for emissions data.

## Rating definitions and conditions

- Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. No overload capability for this rating. Ratings are in accordance with ISO 8528-1, ISO-3046-1, BS 5514 and AS 2789. Average load factor: ≤ 85%. Operating hours/year: max. 500.
- Consult your local *mtu* distributor for derating information.