

Diesel Generator Set



mtu 12V4000 DS1750

380V – 11 kV/50 Hz/grid stability power/ fuel consumption optimized/12V4000G14F/water charge air cooling



Optional equipment and finishing shown. Standard may vary.

Product highlights

Benefits

- Low fuel consumption
- Optimized system integration ability
- High reliability
- High availability of power
- Long maintenance intervals

Support

- Global product support offered

Standards

- Engine-generator set is designed and manufactured in facilities certified to standards ISO 2008:9001 and ISO 2004:14001
- Generator set complies to ISO 8528
- Generator meets NEMA MG1, BS 5000, ISO, DIN EN and IEC standards
- NFPA 110

Power rating

- System ratings: 1590 kVA 1700 kVA
- Accepts rated load in one step per NFPA 110*
- Generator set complies to G3 according to ISO 8528-5
- Generator set exceeds load steps according to ISO 8528-5*

Performance assurance certification (PAC)

- Engine-generator set tested to ISO 8528-5 for transient response
- 100% load factor
- Verified product design, quality and performance integrity
- All engine systems are prototype and factory tested

Complete range of accessories available

- Control panel
- Power panel
- Circuit breaker/power distribution
- Fuel system
- Fuel connections with shut-off valve mounted to base frame
- Starting/charging system
- Exhaust system
- Mechanical and electrical driven radiators
- Medium and oversized voltage alternators

Emissions

- Fuel consumption optimized

Certifications

- CE certification option
- Unit certificate acc. to VDE-AR-N 4110



Application data¹⁾

Engine

Manufacturer		mtu
Model		12V4000G14F
Туре		4-cycle
Arrangement		12V
Displacement: l		57.2
Bore: mm		170
Stroke: mm		210
Compression ratio		16.4
Rated speed: rpm		1500
Engine governor		ECU 9
Max power: kWm		1420
Air cleaner		dry
Fuel system		
Maximum fuel lift: m		5
Total fuel flow: I/min		16
Fuel consumption ²⁾	l/hr	g/kwh
At 100% of power rating:	323.3	189
At 75% of power rating:	250.2	195
At 50% of power rating:	173.7	203

Liquid capacity (lubrication)

Total oil system capacity: l	260
Engine jacket water capacity: l	160
Intercooler coolant capacity: l	40
Combustion air requirements	
Combustion air volume: m³/s	1.6
Max. air intake restriction: mbar	50
Cooling/radiator system	
Coolant flow rate (HT circuit): m³/hr	56
Coolant flow rate (LT circuit): m³/hr	30
Heat rejection to coolant: kW	540
Heat radiated to charge air cooling: kW	200
Heat radiated to ambient: kW	75
Fan power for electr. radiator (40°C): kW	38
Exhaust system	
Exhaust gas temp. (after turbocharger): °C	430
Exhaust gas volume: m³/s	4.0
Maximum allowable back pressure: mbar	85
Minimum allowable back pressure: mbar	30

Standard and optional features

System ratings (kW/kVA)

Generator model	Voltage	Fuel consumption optimized					
			without radiator			with mechanical radiator	
		kWel	kVA*	AMPS	kWel	kVA*	AMPS
Leroy Somer LSA52.3 S5	380 V	1360	1700	2583	1320	1650	2507
(Low voltage	400 V	1360	1700	2454	1320	1650	2382
Leroy Somer standard)	415 V	1360	1700	2365	1320	1650	2295
	380 V	1352	1690	2568	1312	1640	2492
Marathon 743RSL7090 (Low voltage Marathon)	400 V	1344	1680	2425	1312	1640	2367
(Low voltage indiation)	415 V	1272	1590	2212	1272	1590	2212
Marathon 744RSL7091	380 V	1352	1690	2568	1312	1640	2492
(Low voltage Marathon	400 V	1344	1680	2425	1312	1640	2367
oversized)	415 V	1272	1590	2212	1272	1590	2212
Marathon 1020FDH7095 (Medium volt. marathon)	11 kV	1352	1690	89	1312	1640	86
Leroy Somer LSA53.2 VL6 (Medium volt. Leroy Somer)	11 kV	1352	1690	89	1320	1650	87

* cos phi = 0.8

1 All data refers only to the engine and is based on ISO standard conditions (25°C and 100m above sea level).

2 Values referenced are in accordance with ISO 3046-1. Conversion calculated with fuel density of 0.83 g/ml. All fuel consumption values refer to rated engine power.

Standard and optional features

Engine

- 4-cycle
- Standard single stage air filter
- Oil drain extension & shut-off valve
- Closed crankcase ventilation with improved oil seperator
- Governor-electronic isochronous
- Common rail fuel injection
- Fuel consumption optimized engine
- Centrifugal oil filter

Generator

- 4 pole three-phase synchronous generator
- Brushless, self-excited, self-regulating, self-ventilated
- Digital voltage regulator
- Anti condensation heater
- Stator winding Y-connected, accessible neutral (brought out)
- Protection IP23

- Insulation class H, utilization acc. to H
- Radio suppression EN 55011, group 1, cl. B
- Short circuit capability 3xIn for 10sec Winding and bearing RTDs
- (without monitoring)

Mechanical radiator

□ Jacket water heater

- Excitation by AREP
- Mounting of CT's: 2 core CT's
- Winding pitch: 2/3 winding
- Voltage setpoint adjustment ± 10%

□ Electrical driven front-end cooler

- Meets NEMA MG-1, BS 5000, IEC 60034-1, VDE 0530, DIN EN 12601, AS 1359 and ISO 8528-3 requirements
- Leroy Somer low voltage generator
- □ Marathon low voltage generator
- □ Oversized generator
- Medium voltage generator

- Cooling system
- Jacket water pump
- Thermostat(s)
- Water charge air cooling
- Control panel
- Unit cabling with coded plugs for easy connection of customer-specific controls (VO)
- □ Pre-wired control cabinet for easy application of customized controller (V1+)
- □ Island operation (V2)
- □ Automatic mains failure operation with ATS (V3a)
- \Box Automatic mains failure operation incl. control of generator and mains breaker (V3b)
- □ Island parallel operation of multiple gensets (V4)
- □ Automatic mains failure operation with short (< 10s) mains parallel overlap synchronization (V5)
- Connectivity

The engine system automatically collects and transfers engine data to the manufacturer from time to time. The data is used by the manufacturer for the purposes of product

a single genset (V6)

- multiple gensets (V7)
- □ Basler controller

- SAE J1939 engine ECU communications

- Event recording
- □ IP 54 front panel rating with integrated gasket
- □ Different expansion modules
- Remote annunciator
- Daytank control
- □ Generator winding temperature monitoring
- □ Generator bearing temperature monitoring
- □ Modbus TCP-IP

development and improvement as well as service optimization. Users can log in or register via https://mtu-go.com and also gain insight into the data.

- □ Mains parallel operation of
- □ Mains parallel operation of

 - Deif controller
 - □ Complete system metering
 - Digital metering
- Engine parameters
- Generator protection functions
- Engine protection
- Parametrization software
- Multilingual capability
- Multiple programmable contact inputs
- Multiple contact outputs

Standard and optional features

Power panel


□ Supply electrical driven radiator from 45kW - 75kW

Circuit breaker/power distribution

 3-pole circuit breaker 4-pole circuit breaker 	Electrical-actuated circuit breaker	Base frame mounted GCB, pre-wired with generator, ready for commissioning
Fuel system		
 Flexible fuel connectors mounted to base frame Fuel filter with water separator Fuel filter with water separator heavy-duty 	 Switchable fuel filter with water separator Switchable fuel filter with water separator heavy-duty Seperate fuel cooler 	Fuel cooler integrated into cooling equipment
Starting/charging system		
 24V starter Redundant starting system 	 Starter batteries, cables, rack, disconnect switch (lockable) 	 Battery charger Alternator
Mounting system		
Welded base frame	 Resilient engine and generator mounting Modular base frame design 	Base frame mounting on foundation/base plate with using clamping brackets
Exhaust system		
Exhaust bellows with connection flange	Exhaust silencer with	Exhaust silencer with

- □ Exhaust silencer with 10 dB(A) sound attenuation
- 30 dB(A) sound attenuation
- 40 dB(A) sound attenuation □ Y-connection-pipe

Weights and dimensions

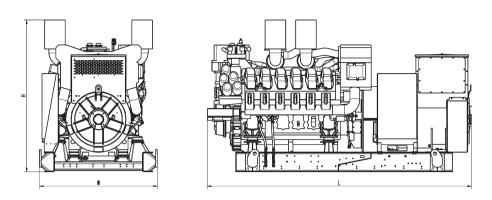

Drawing above for illustration purposes only, based on a standard open power 400 Volt engine-generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

System	Dimensions (LxWxH)	Weight (dry/less tank)		
Open power unit (OPU)	4059 x 1810 x 2330 mm	10654 kg		

Weights and dimensions are based on open power units and are estimates only. Consult the factory for accurate weights and dimensions for your specific engine-generator set.

Sound data

Emissions data

- Consult your local *mtu* distributor for sound data.
- Consult your local *mtu* distributor for emissions data.

Rating definitions and conditions

- Grid stability power ratings apply to installations serving electric utility programs. At constant or varying load, the number of generator set operating hours is limited to 1000 hours per year with no more than 500 hours per year at 100% load without interruption. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO 8528-1, ISO 3046-1, BS 5514 and AS 2789. Average load factor: ≤ 100%.
- Consult your local *mtu* distributor for derating information.