

# **Diesel Generator Set**



# **mtu** 16V4000 DS2250

380V – 11 kV/50 Hz/prime power for stationary emergency/ NOx emission optimized/16V4000G14F/water charge air cooling



Optional equipment and finishing shown. Standard may vary.

# Product highlights

## Benefits

- Low fuel consumption
- Optimized system integration ability
- High reliability
- High availability of power
- Long maintenance intervals

## Support

- Global product support offered

## Standards

- Engine-generator set is designed and manufactured in facilities certified to standards ISO 2008:9001 and ISO 2004:14001
- Generator set complies to ISO 8528
- Generator meets NEMA MG1, BS 5000, ISO, DIN EN and IEC standards
- NFPA 110

## Power rating

- System ratings: 2050 kVA 2160 kVA
- Accepts rated load in one step per NFPA 110\*
- Generator set complies to G3 according to ISO 8528-5
- Generator set exceeds load steps according to ISO 8528-5\*

#### Performance assurance certification (PAC)

- Engine-generator set tested to ISO 8528-5 for transient response
- 85% load factor
- Verified product design, quality and performance integrity
- All engine systems are prototype and factory tested

## Complete range of accessories available

- Control panel
- Power panel
- Circuit breaker/power distribution
- Fuel system
- Fuel connections with shut-off valve mounted to base frame
- Starting/charging system
- Exhaust system
- Mechanical and electrical driven radiators
- Medium and oversized voltage alternators

## Emissions

NOx emission optimized

## Certifications

- CE certification option
- Unit certificate acc. to VDE-AR-N 4110



# Application data<sup>1)</sup>

#### Engine

Manufacturer		mtu
Model		16V4000G14F
Туре		4-cycle
Arrangement		16V
Displacement: l		76.3
Bore: mm		170
Stroke: mm		210
Compression ratio		16.4
Rated speed: rpm		1500
Engine governor		ECU 9
Max power: kWm		1798
Air cleaner		dry
Fuel system		
Maximum fuel lift: m		5
Total fuel flow: I/min		20
Fuel consumption <sup>2)</sup>	l/hr	g/kwh
At 100% of power rating:	472.2	218
At 75% of power rating:	346.1	213
At 50% of power rating:	234	216

## Liquid capacity (lubrication)

Liquid capacity (lubrication)	
Total oil system capacity: l	300
Engine jacket water capacity: l	175
Intercooler coolant capacity: l	50
Combustion air requirements	
Combustion air volume: m³/s	3.2
Max. air intake restriction: mbar	50
Cooling/radiator system	
Coolant flow rate (HT circuit): m³/hr	68.5
Coolant flow rate (LT circuit): m³/hr	30
Heat rejection to coolant: kW	790
Heat radiated to charge air cooling: kW	460
Heat radiated to ambient: kW	90
Fan power for electr. radiator (40°C): kW	70
Exhaust system	
Exhaust gas temp. (after turbocharger): °C	480
Exhaust gas volume: m³/s	7.4
Maximum allowable back pressure: mbar	85
Minimum allowable back pressure: mbar	30

# Standard and optional features

## System ratings (kW/kVA)

Generator model	Voltage	NOx emission optimized					
			without radiator			with mechanical	radiator
		kWel	kVA*	AMPS	kWel	kVA*	AMPS
Leroy Somer LSA52.3 S7	380 V	1728	2160	3282	1656	2070	3145
(Low voltage Leroy Somer standard)	400 V	1728	2160	3118	1656	2070	2988
	415 V	1728	2160	3005	1656	2070	2880
Marathon 744RSL7092 (Low voltage Marathon)	380 V	1704	2130	3236	1640	2050	3115
	400 V	1704	2130	3074	1640	2050	2959
	415 V	1696	2120	2949	1640	2050	2852
Marathon 1020FDL7093	380 V	1704	2130	3236	1640	2050	3115
(Low voltage	400 V	1704	2130	3074	1640	2050	2959
Marathon oversized)	415 V	1696	2120	2949	1640	2050	2852
Marathon 1020FDH7097 (Medium volt. marathon)	11 kV	1712	2140	112	1640	2050	108
Leroy Somer LSA53.2 XL9 (Med. volt. Leroy Somer)	11 kV	1728	2160	113	1656	2070	109

\* cos phi = 0.8

1 All data refers only to the engine and is based on ISO standard conditions (25°C and 100m above sea level).

2 Values referenced are in accordance with ISO 3046-1. Conversion calculated with fuel density of 0.83 g/ml. All fuel consumption values refer to rated engine power.

## Standard and optional features

#### Engine

- 4-cycle
- Standard single stage air filter
- Oil drain extension & shut-off valve
- Closed crankcase ventilation
- Governor-electronic isochronous
- Common rail fuel injection
- NOx emission optimized

- Generator
- 4 pole three-phase synchronous generator
- Brushless, self-excited, self-regulating, self-ventilated
- Digital voltage regulator
- Anti condensation heater
- Stator winding Y-connected,
- accessible neutral (brought out)
- Protection IP23

- Winding and bearing RTDs (without monitoring)
  - Excitation by AREP

Mechanical radiator

□ Jacket water heater

- Mounting of CT's: 2 core CT's
- Winding pitch: 2/3 winding
- Voltage setpoint adjustment ± 10%

□ Electrical driven front-end cooler

Insulation class H, utilization acc. to H

Short circuit capability 3xIn for 10sec

Radio suppression EN 55011, group 1, cl. B

- Meets NEMA MG-1, BS 5000, IEC 60034-1, VDE 0530, DIN EN 12601, AS 1359 and ISO 8528-3 requirements
- Leroy Somer low voltage generator
- □ Marathon low voltage generator
- □ Oversized generator
- Medium voltage generator

- Cooling system
- Jacket water pump
- Thermostat(s)
- Water charge air cooling
- Control panel
- Unit cabling with coded plugs for easy connection of customer-specific controls (VO)
- □ Pre-wired control cabinet for easy application of customized controller (V1+)
- □ Island operation (V2)
- □ Automatic mains failure operation with ATS (V3a)
- □ Automatic mains failure operation incl. control of generator and mains breaker (V3b)
- □ Island parallel operation of multiple gensets (V4)
- □ Automatic mains failure operation with short (< 10s) mains parallel overlap synchronization (V5)

#### Connectivity

The engine system automatically collects and transfers engine data to the manufacturer from time to time. The data is used by the manufacturer for the purposes of product

□ Mains parallel operation of a single genset (V6)

- □ Mains parallel operation of multiple gensets (V7)
- □ Basler controller

- SAE J1939 engine ECU communications
- Parametrization software
- Multilingual capability
- Multiple programmable contact inputs
- Multiple contact outputs

- Event recording
- □ IP 54 front panel rating with integrated gasket
- □ Different expansion modules
- Remote annunciator
- Daytank control
- □ Generator winding temperature monitoring
- □ Generator bearing
- temperature monitoring
- □ Modbus TCP-IP

development and improvement as well as service optimization. Users can log in or register via https://mtu-go.com and also gain insight into the data.

- Deif controller □ Complete system metering
- Digital metering
- Engine parameters
- Generator protection functions
- Engine protection

# Standard and optional features

## Power panel


□ Supply electrical driven radiator from 45kW - 75kW

#### Circuit breaker/power distribution

<ul> <li>3-pole circuit breaker</li> <li>4-pole circuit breaker</li> </ul>	Electrical-actuated circuit breaker	Base frame mounted GCB, pre-wired with generator, ready for commissioning
Fuel system		
<ul> <li>Flexible fuel connectors mounted to base frame</li> <li>Fuel filter with water separator</li> <li>Fuel filter with water separator heavy-duty</li> </ul>	<ul> <li>Switchable fuel filter with water separator</li> <li>Switchable fuel filter with water separator heavy-duty</li> <li>Seperate fuel cooler</li> </ul>	Fuel cooler integrated into cooling equipment
Starting/charging system		
<ul> <li>24V starter</li> <li>Redundant starting system</li> </ul>	<ul> <li>Starter batteries, cables, rack, disconnect switch (lockable)</li> </ul>	<ul> <li>Battery charger</li> <li>Alternator</li> </ul>
Mounting system		
Welded base frame	<ul> <li>Resilient engine and generator mounting</li> <li>Modular base frame design</li> </ul>	Base frame mounting on foundation/base plate with using clamping brackets
Exhaust system		
Exhaust bellows with connection flange	Exhaust silencer with	Exhaust silencer with

- □ Exhaust silencer with 10 dB(A) sound attenuation
- 30 dB(A) sound attenuation
- 40 dB(A) sound attenuation □ Y-connection-pipe

## Weights and dimensions

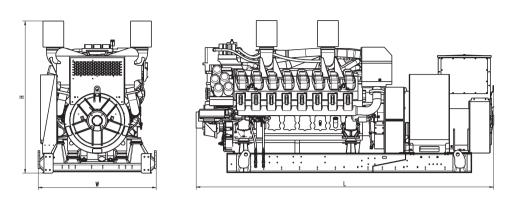

Drawing above for illustration purposes only, based on a standard open power 400 Volt engine-generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

System	Dimensions (LxWxH)	Weight (dry/less tank)	
Open power unit (OPU)	4766 x 1810 x 2330 mm	12.428 kg	

Weights and dimensions are based on open power units and are estimates only. Consult the factory for accurate weights and dimensions for your specific engine-generator set.

## Sound data

## **Emissions data**

- Consult your local *mtu* distributor for sound data.
- Consult your local *mtu* distributor for emissions data.

## Rating definitions and conditions

- Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO 8528-1, ISO-3046-1, BS 5514 and AS 2789. Average load factor: ≤ 85%. Operating hours/year: max. 500.
- Consult your local *mtu* distributor for derating information.